


MDC/RAILMEX MODEL **BSF** STAINLESS STEEL BRAIDED FLEXIBLE HOSE / PUMP CONNECTOR

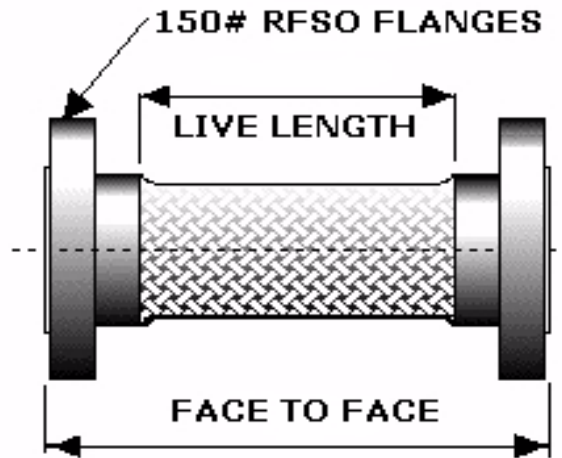

MATERIALS OF CONSTRUCTION

HOSE	300 Series Stainless Steel
BRAID	300 Series Stainless Steel
COLLAR	300 Series Stainless Steel
FLANGES	Carbon Steel, Class 150 (ANSI B16.5 Drilling), Raised Face

AVAILABLE ACCESSORIES / FEATURES :

- * Tie Rods
- * Smooth Flow Liner
- * External Guard
- * Double Braided
- * Jacketed Assembly
- * Longer Lengths, Other Fittings

QTY	MDC P/N	SIZE (IN.)	OVERALL LENGTH "A"	WORKING PRESSURE *		LIVE LENGTH (IN.)	APPROX. WEIGHT (LBS)	NOTES
				AT 70 F (PSIG)	AT 250 F (PSIG)			
	2.00"BSF-10.00"	2"	10"	315	290	5-1/2	11	
	2.50"BSF-12.00"	2-1/2"	12"	420	386	7-1/4	15	
	3.00"BSF-12.00"	3"	12"	378	348	7-1/8	19	
	4.00"BSF-15.00"	4"	15"	269	248	9-7/8	29	
	5.00"BSF-18.00"	5"	18"	329	303	12-5/8	34	
	6.00"BSF-18.00"	6"	18"	315	290	12-3/8	43	
	8.00"BSF-18.00"	8"	18"	280	258	12	70	
	10.00"BSF-18.00"	10"	18"	220	202	11-5/8	97	

NOTES:

- * Lengths shown are minimum for vibration.
- * Braided hose assemblies are designed for vibration, lateral and angular deflection. Torsion/axial movement not allowed.
- * For specific offset values contact MDC to determine adequate face to face dimension.
- * Available : assemblies with ISO 10380 Certified (50,000 life cycles) hose.
- * For elevated temperature service (above 250 F) please contact JAG for actual working pressure ratings.
- * Working pressure ratings may vary on specific application. Above pressure ratings are based on simple pump vibration in a static installation. For other applications, contact MDC.

CUSTOMER (COMPANY)	
CUSTOMER (INDIVIDUAL)	
CUSTOMER TEL / FAX	
PROJECT	
ENGINEERING COMPANY	
CUSTOMER REF.	
MDC REF.	
MDC DWG. NO.	20790

2008-02-13

JMP



MARK DAVID CANADA INC.

2011 Lucien Thimens
Montreal, QC., H4R, 1K8, Canada
TEL.: (514) 748-8770, FAX: (514) 313-5697