


Engineering Specification:

Flexible pump connectors / expansion joints shall be of the molded spherical type. Neoprene* and nylon construction with internal steel wire, molded within the raised face ends, for added strength. Pressure rated for 225 psi at 240 deg. F, with a minimum of 4 to 1 safety factor. Flanges shall be one-piece, free-floating, Class 150 galvanized plate steel type.

* substitute for other materials if required

Approved Product: Model 101, as manufactured by Mark David Canada Inc., Montreal, QC, Canada to dwg. 20701.

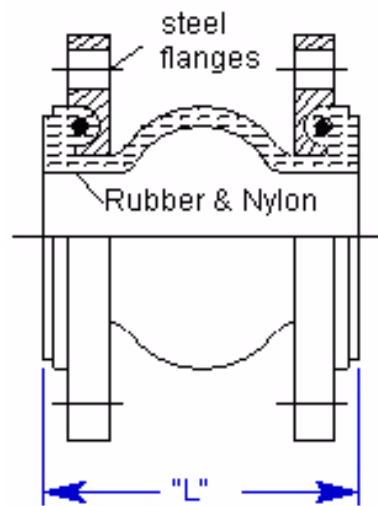

(JMP-2010)