


Engineering Specification:

Flexible pump connectors / expansion joints shall be of the **twin** spherical molded type, reinforced with external root ring (sizes 1-1/2" to 2") between spheres. Neoprene and nylon construction. Pressure rated for 150 psi at 211°F with a minimum 4 to 1 safety factor. End fittings shall be galvanized steel, female, Class 150 NPT threaded unions.

Approved Product: Model 102-U, as manufactured by Mark David Canada Inc., Montreal, QC, Canada to dwg. 20703.

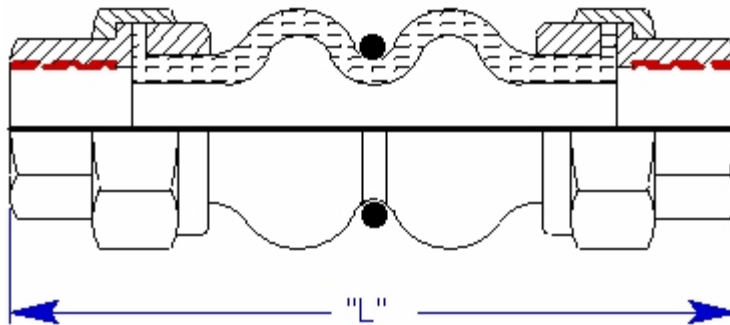

(JMP-2010)